


Open Frame Touch Monitor

HO 161 HTB

39,6 cm / 15.6" Diagonal
LED Backlight – Format 16:9

- 1920 x 1080 Resolution Full HD 1080P
- 10-Point Touch P-Cap Technology
- 170° / 170° Ultra Wide Viewing Angle
- Dual Input: HDMI + VGA
- IP54 (front) Rating Level
- 12 Volt External Power Supply
- ≥7H Toughened Hard Panel Surface
- TP Module Thickness 3,3 mm
- Touch-Through Glass (available upon request*)
- Sturdy Metal Case
- VESA Mount and Multiple Mounting Options
- Orientation: Landscape, Portrait, Face-Up



39,6 cm / 15.6"

Part. No.: HO 161 HTB

SIZE, RESOLUTION



15.6"
16:9 Aspect Ratio



Full HD
1920 x 1080

CONNECTIVITY, IP LEVEL




VGA
HDMI



IP 54
Water & Dust
Protection

VIEWING ANGLE, VESA



170° Wide
Viewing Angle



VESA
Wall-Mountable

OTHER FEATURES





10 Points
Touch



Touch to
USB Link

Display Size	39,6 cm / 15.6" Diagonal
Panel Type	TFT – LED Backlight
Aspect Ratio	16:9
Resolution (H x V)	1920 x 1080 Full HD
Brightness	250 cd/m ² (Panel) – 212 cd/m ² (Monitor)
Contrast (Typ.)	800:1 (Typical)
Display Area	344,16 x 193,59 mm
Viewing Angle L/R; U/D	170° H / 170° V (CR > 10)
Response Time	30 msec
Pixel Pitch	0,17925 (H) X 0,17925 (V) mm
Touch Type	Projected Capacitive Type – 10 Point Touch Material Glass + Glass
Display Colors	256K Colors
Horizontal Frequency	30 ~ 80 kHz
Vertical Frequency	56 ~ 75 Hz
Max Display Frequency	1920 x 1080 @ 60Hz
Input 1	VGA
Input 2	HDMI
Input 3	USB Interface (Touch)
Speakers	-
Power Consumption	On: 6W; Stand-by: 0,2W; Off: 0,2W
Power Range	External Power Supply Input: AC 100 ~ 240 Volt; 50 ~ 60 Hz Output: DC 12V – 3°
Product Dimensions	405 x 36,4 x 256 mm (W x D x H)
Packing Dimensions	470 x 145 x 336 mm (W x D x H)
Net / Gross Weight	2,45 Kg / 3,05 Kg

VESA Mounting	75 x 75 mm / 100 x 100 mm Screws: M4, 4mm (Max), pitch 0,7 mm
Display Protection	TP Module Protection Thickness 3,3±0,3 mm
Hardness / Transmittance	≥7H Toughened hard panel surface / ≥85%
IP Rating Level	IP 54 (Front), Water and Dust Protection *
Control	Auto, Power, (+), (-), Menu
LED Backlight life	15.000 hours
Accessory	Power supply; HDMI Cable (1,5m); USB Cable for Touch.
Certifications	CE, RoHS, REACH
On Screen Display	9 Languages
Color	9300, 7500, 6500, User Mode
Orientation	Landscape, Portrait, Face-Up

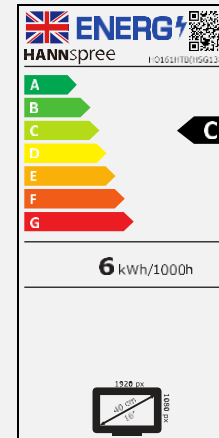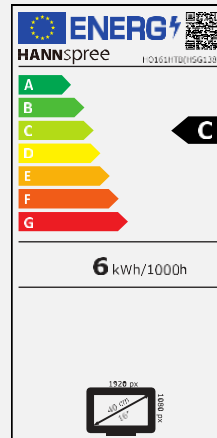

Supplier's Name	HANNspree
Model Name	HO161HTB
Energy efficiency class for standard Dynamic Range (SDR)	C
Annual Energy Power Consumption (kWh/1000h)	6 kWh/1000h
On mode power demand for Standard Dynamic Range (SDR)	6 W
Off mode power demand (W)	0,2 W
Standby mode power demand (W)	0,2 W
Screen Diagonal (cm / inches)	39,6cm / 15.6"
Resolution	1920 x 1080

PART. NO.:
HO 161 HTB




* IP54: The IP Code classifies how resistant a device is to foreign objects and moisture. IP54 means that the monitor will operate in dusty conditions, and will resist splashing water.


HANNSpree

HO 161 HTB
15.6" Open Frame Touch Monitor

Experts in **Display**

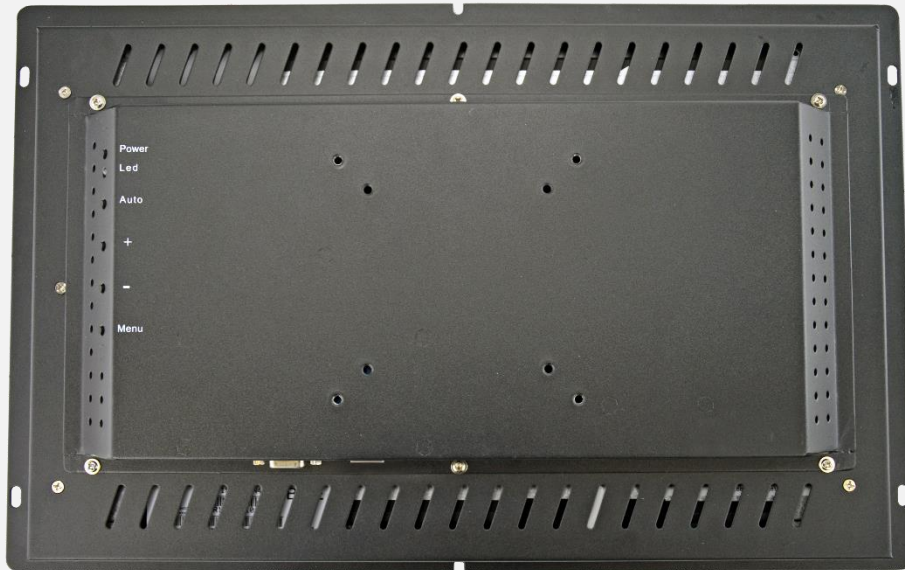

HO 161 HTB 15.6" Open Frame Touch Monitor

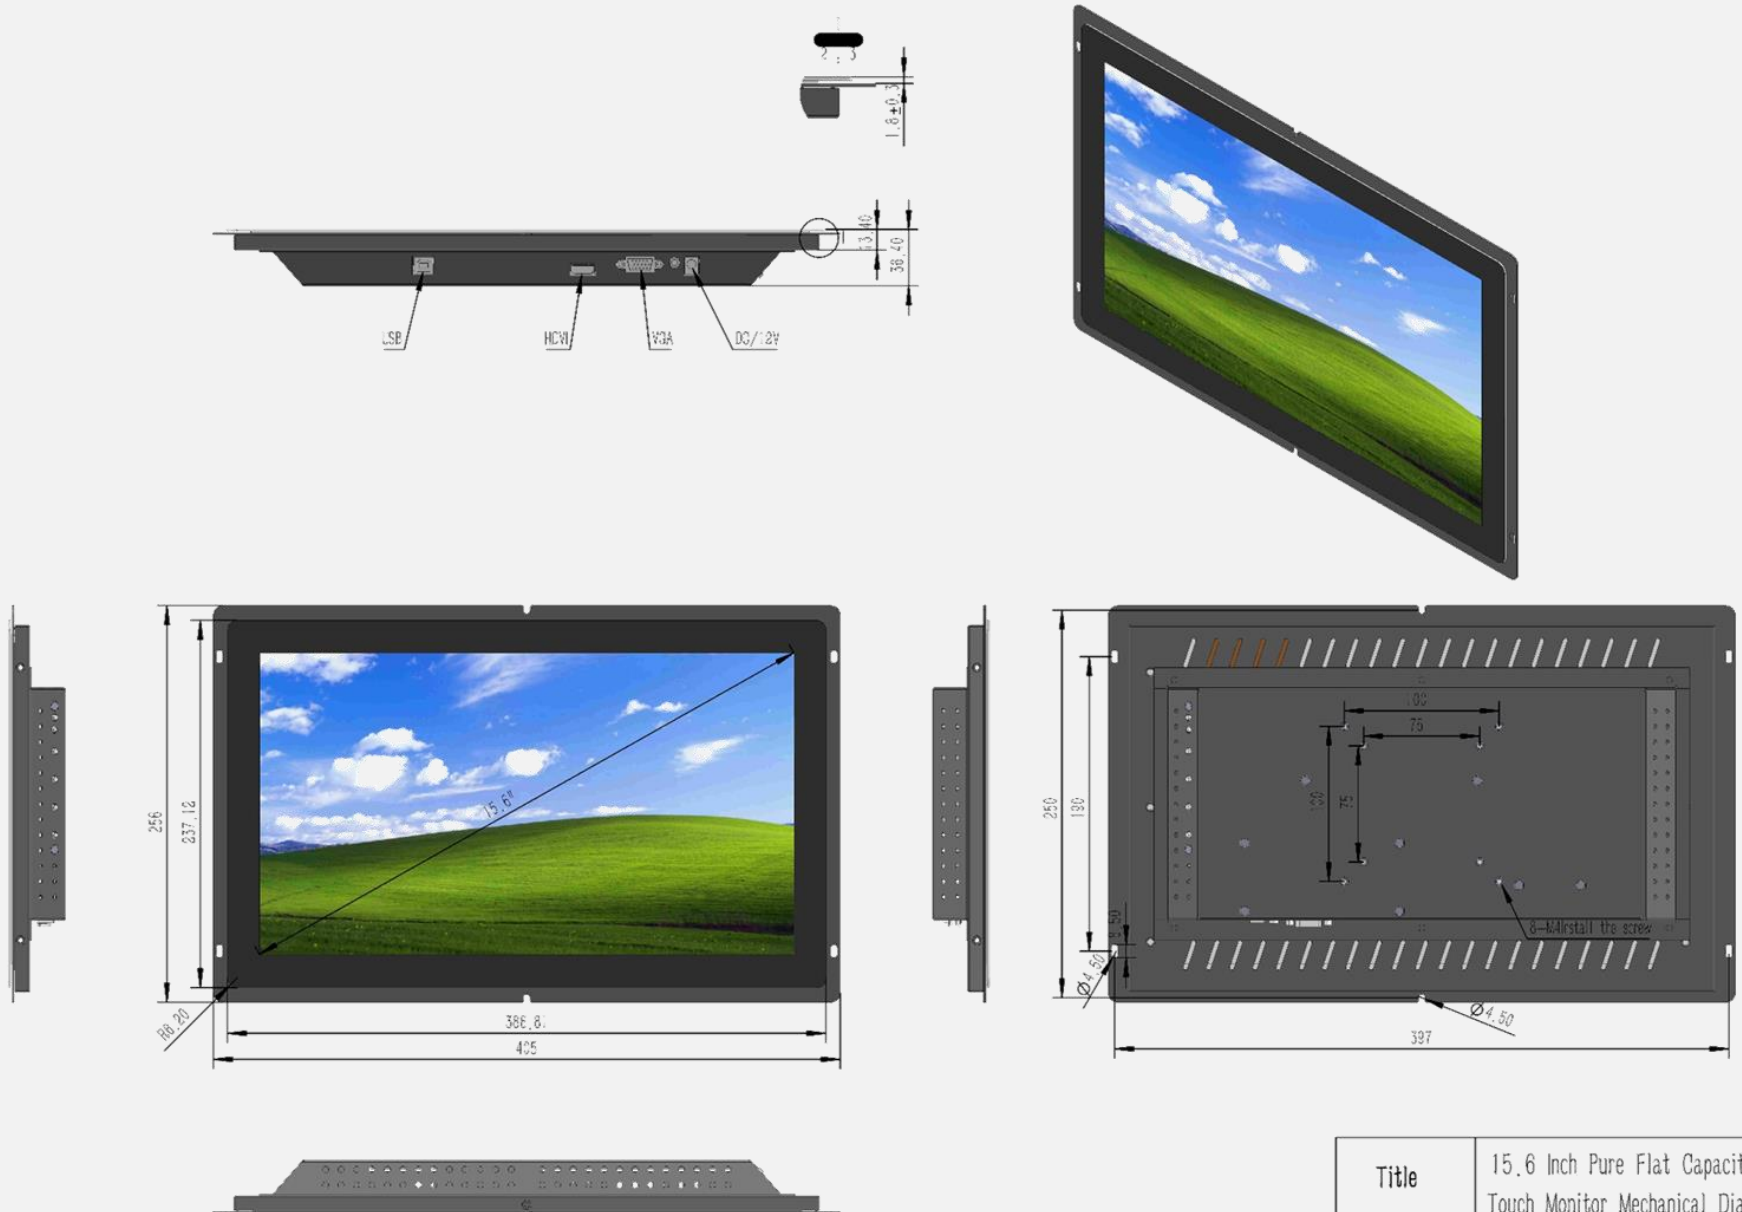

Title	15.6 Inch Pure Flat Capacitive Touch Monitor Mechanical Diagram
-------	---