

HT 225 HPA

54,6 cm / 21.5" Diagonal
LED Backlight – Format 16:9

- 21,5" Touch Monitor LED Backlight
- 1920 x1080 Full HD Resolution
- 10-Point Touch
- 178° / 178° Ultra Wide Viewing Angle
- Anti-Glare
- 80,000,000:1 Active Contrast
- HDMI + DP + VGA Inputs
- Built-In Stereo Speakers
- Multi-Video Modes : PC / Movie / Game / ECO
- Wall-Mountable (VESA)
- Ergonomic Smart adjustable stand.
- Tilt Angle:15°~70°
- HDMI Cable Included
- VESA Mount + Including Landscape and Portrait mounting options



54,6 cm / 21.5"

Part. No.: HT 225 HPA

SIZE, RESOLUTION



21.5"
16:9 Aspect Ratio



Full HD
1920 x 1080

CONNECTIVITY, SPEAKER



HDMI
DP
VGA



Built-In
Stereo Speaker

VIEWING ANGLE, VESA



178° Ultra-Wide
Viewing Angle



VESA
Wall-Mountable

TOUCH DISPLAY FEATURES



10 Point
Touch



USB
Link





7H
Surface



Adj
Stand

Display Size	54,6cm / 21.5" Diagonal
Panel Type	TFT – LED Backlight, ADS Panel (*)
Aspect Ratio	16:9
Resolution (H x V)	1920 x 1080 Full HD
Brightness	300 cd/m ² (Panel) – 246 cd/m ² (Monitor)
Contrast	1.000:1 (Typical) - 80.000.000:1 (Active)
Viewing Angle L/R; U/D	178° H – 178° V (CR >10)
Response Time	7 msec (GTG)
Pixel Pitch	0,24825 (H) x 0,24825 (V) mm
Touch Type	Projected Capacitive Type – 10 Point Touch Material: OGS + AG Film
Panel Surface	Anti Glare Film, Haze-level: 10%
Display Colors	16.7M Colors
Horizontal Frequency	30 ~ 82 kHz
Vertical Frequency	55 ~ 76 Hz
Max Display Frequency	1920 x 1080 @ 60Hz
Input 1	D-Sub (VGA)
Input 2	HDMI (Ver. 1.3; compatible with 1.4)
Input 3	Display Port (Ver. 1.2a)
Buil-in Speakers	Yes, 2W x 2; PC Audio line in
Power Consumption	On: 16W; Stand-by: 0,3W; Off: 0,3W
AC Power Range	AC 100 ~ 240 Volt; 50 ~ 65 Hz
Product Dimensions	490,3 x 47,8 x 299,4 mm (W x D x H)
Packing Dimensions	550 x 115 x 366 mm (W x D x H)
Net / Gross Weight	3.6 Kg / 4.6 Kg
Bezel & Color Plan	Arm / Base/Rear Cover/Bezel- Texture

VESA Mounting	100 x 100 mm
Monitor Stand	Smart Adjustable Stand ("book" type)
Tilt / Kensington Lock	15° ~ 70° / Yes
Display Protection	Thickness 0,7 mm
Hardness / Transmittance	≥7H Toughened hard panel surface / ≥82%
Controls	Menü, Bri (+), Vol (-), Input/Enter, Power
Color	Warm, Natural, Cool, User Mode
Preset Mode	Standard, Game, Cinema, Scenery, Text Modes
On Screen Display	9 OSD Languages
Accessory	Power Cable (1,8m); HDMI Cable (1,5m); USB Cable (1,8m); Warranty Card; Quick Start Guide
Orientation	Landscape, Portrait

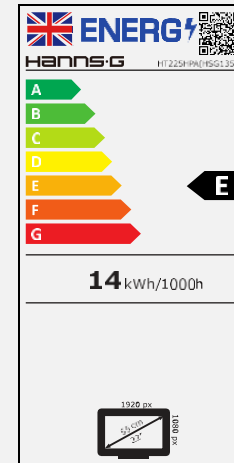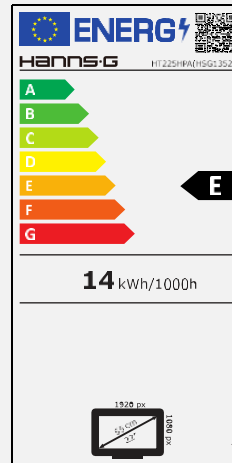

Supplier's Name	HANNSpree
Model Name	HT225HPA
Energy efficiency class for standard Dynamic Range (SDR)	E
Annual Energy Power Consumption (kWh/1000h)	14 kWh/1000h
On mode power demand for Standard Dynamic Range (SDR)	16 W
Off mode power demand (W)	0,3 W
Standby mode power demand (W)	0,3 W
Screen Diagonal (cm / inches)	54,6cm / 21.5"
Resolution	1920 x 1080

PART. NO.:
HT 225 HPA

4 711404 023118 >

© 2021 HANNSpree Europe Holdings B.V. Specifications and design as well as accessories are subject to change without notice. Screen shots are simulated. Actual products may differ slightly from those illustrated on this promotion material. Please refer to actual samples for final selection. The products displayed on this promotion material may not be available for purchase in your particular country or locality. Please check with your local HANNSpree authorized representatives for the availability of specific products in your area. All brand, product, Service names and logos are trademarks and/or registered trademarks of their respective manufactures and Companies.

* "ADS" word mark / trademark and related patents on technologies belong to their respective owners.